


DIN 7500

Thread Rolling Screws

FOR METAL



FORM C DIN7985		Pozidriv®			Pan		Zinc Plated (CR3) & Lubricated		
Dia. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D max
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
4									4
5	110,000 1,000	55,000 1,000	33,000 1,000						5
6	90,000 1,000	51,000 1,000	33,000 1,000	24,000 1,000	15,000 1,000	8,500 1,000			6
7									7
8	85,000 1,000	45,000 1,000	30,000 1,000	21,000 1,000	14,000 1,000	7,500 1,000	4,500 1,000		8
10	75,000 1,000	45,000 1,000	25,000 1,000	19,000 1,000	12,000 1,000	7,000 1,000	4,500 1,000		10
12			22,000 1,000	16,000 1,000	12,000 1,000	6,000 1,000	4,000 500		12
14		30,000 1,000							14
16		29,000 1,000	18,000 1,000	14,000 1,000	9,500 1,000	5,500 1,000	3,700 500		16
18									18
20			15,000 1,000	10,000 1,000	8,000 1,000	5,000 500	3,000 500	1,500 250	20
25			15,000 1,000	10,000 1,000	7,000 1,000	4,000 500	3,000 500		25
30			12,000 1,000		6,000 500	3,500 500	2,500 250		30
35					5,500 500	3,500 500	2,000 250		35
40					4,800 500	2,000 250	2,000 250		40
45									45
50							1,600 250		50


PRODUCT CODE*	PRODUCT DESCRIPTION*
TTMWZPAN40016ZC	M4 x 16 Pozidriv® Pan DIN 7500 FORM C Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM C DIN7985			Pozidriv®			Pan		A2 - Stainless Steel		
Dia. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D max	
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max	
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max	
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max	
s - A/F	-	-	-	-	-	-	-	-	s - A/F	
Recess	1	1	1	2	2	2	3	4	Recess	
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm	
4									4	
5			40,000 1,000						5	
6			33,000 1,000		15,000 1,000	8,000 1,000			6	
7									7	
8			30,000 1,000		14,000 1,000	7,500 1,000	4,500 1,000		8	
10			25,000 1,000		12,000 1,000	7,000 1,000	5,000 1,000		10	
12			22,000 1,000		11,000 1,000	6,000 1,000	4,500 500		12	
14									14	
16			18,000 1,000		10,000 1,000	5,500 1,000	4,500 500		16	
18									18	
20			15,000 1,000		8,000 1,000	5,000 500	3,000 500		20	
25			15,000 1,000		7,000 1,000	4,000 500	3,000 500		25	
30						3,500 500	2,500 250		30	
35							2,500 250		35	
40							2,200 250		40	
45									45	
50									50	

PRODUCT CODE*

SSTTMWZPAN50012A2

PRODUCT DESCRIPTION*


M5 x 12 Pozidriv® Pan DIN 7500 FORM C Tap-Fix® Screw A2-Stainless Steel

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM M DIN965

Pozidriv®

Countersunk

Zinc Plated (CR3) & Lubricated

Di. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Di. D max
Di. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Di. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
4									4
5									5
6		90,000 1,000	65,000 1,000	40,000 1,000	35,000 1,000				6
7									7
8		75,000 1,000	44,000 1,000	35,000 1,000	26,000 1,000	15,000 1,000			8
10		50,000 1,000	38,000 1,000	30,000 1,000	20,000 1,000	12,000 1,000			10
12			33,000 1,000	26,000 1,000	20,000 1,000	10,500 1,000	8,000 1,000	3,500 500	12
14									14
16			25,000 1,000	20,000 1,000	15,000 1,000	9,000 1,000	6,000 1,000	3,000 500	16
18									18
20			18,000 1,000	13,000 1,000	12,000 1,000	7,500 1,000	5,000 500	2,000 500	20
25			13,000 1,000		9,000 1,000	6,000 1,000	4,000 500	2,000 250	25
30					9,000 1,000	4,000 500	3,000 250	1,500 250	30
35							2,600 250		35
40						3,500 500	2,400 250	1,000 250	40
45							2,000 250		45
50							1,500 250	1,000 200	50

PRODUCT CODE*

TTMWZCSK25006ZC

PRODUCT DESCRIPTION*


M2.5 x 6 Pozidriv® Countersunk DIN 7500 FORM M Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM M DIN965			Pozidriv®			Countersunk			A2 - Stainless Steel		
Dia. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D max		
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max		
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max		
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref		
s - A/F	-	-	-	-	-	-	-	-	s - A/F		
Recess	1	1	1	2	2	2	3	4	Recess		
L- Length mm	Bulk Carton Quantity Small Box Quantity										L- Length mm
4											4
5											5
6			65,000 1,000		32,000 1,000	16,000 1,000					6
7											7
8			45,000 1,000		21,000 1,000	15,000 1,000	10,000 1,000				8
10			42,000 1,000		20,000 1,000	12,000 1,000	8,000 1,000				10
12			33,000 1,000		20,000 1,000	10,500 1,000	8,000 1,000				12
14											14
16			25,000 1,000		14,000 1,000	8,400 1,000	5,400 1,000				16
18											18
20			18,000 1,000		9,000 1,000	6,300 1,000	5,400 500				20
25			18,000 1,000		9,000 1,000	6,000 1,000	4,600 500				25
30						4,000 500	3,000 250				30
35							2,600 250				35
40							2,400 250				40
45											45
50											50



PRODUCT CODE* SSTTMWZCSK50010A2 **PRODUCT DESCRIPTION*** M5 x 10 Pozidriv® Countersunk DIN 7500 FORM M Tap-Fix® Screw A2-Stainless Steel

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL

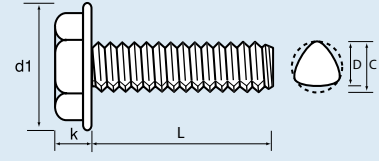

FORM D Equivalent

Washer Hexagon Zinc Plated (CR3) & Lubricated

Dia. D max	M3	M4	M4	M5	M6	M8	M10	-	Dia. D max
Dia. C max	3.07	4.08	4.08	5.09	6.10	8.13	10.15	-	Dia. C max
d1 - max	6.30	8.30	8.80	10.40	13.00	16.90	22.10	-	d1 - max
k - max	2.40	3.50	4.10	4.50	5.20	7.00	9.00	-	k - max
s - A/F max	5.00	5.50	7.00	8.00	10.00	13.00	17.00	-	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
5									5
6	35,000 1,000	18,000 1,000	13,000 1,000						6
7									7
8	30,000 1,000		12,000 1,000	8,000 1,000					8
10	25,000 1,000	14,000 1,000	10,500 1,000	7,000 1,000	4,500 500				10
12	20,000 1,000	13,000 1,000	10,000 1,000	6,500 1,000	4,000 500	2,000 500			12
16		11,000 1,000	9,000 1,000	5,500 1,000	3,500 500	1,800 500			16
20	17,000 1,000	8,000 1,000	8,000 1,000	5,000 500	3,000 500	1,500 250	1,000 125		20
25		7,500 1,000	7,000 1,000	4,000 500	2,500 250	1,500 250	1,000 125		25
30				3,500 500	2,500 250	1,200 250	0,800 125		30
35					2,000 250				35
40					1,700 250	1,000 250	0,700 100		40
45									45
50					1,200 125	0,900 125	0,500 50		50
55									55
60						0,700 100			60
-									-

PRODUCT CODE*

TTMWWHX99030ZC

PRODUCT DESCRIPTION*


M10 x 30 Washer Hexagon DIN 7500 FORM D Equivalent Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM C DIN7985		T-Drive			Pan		Zinc Plated (CR3) & Lubricated		
Dia. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D max
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
4									4
5			33,000 1,000						5
6	95,000 1,000		33,000 1,000	24,000 1,000	15,000 1,000	8,500 1,000			6
7									7
8		45,000 1,000	30,000 1,000	14,000 1,000	14,000 1,000	7,500 1,000			8
10			25,000 1,000	19,000 1,000	12,000 1,000	6,500 1,000	4,500 1,000		10
12		35,000 1,000	22,000 1,000	17,000 1,000	11,000 1,000	6,000 1,000	4,000 500		12
14									14
16			18,000 1,000		9,500 1,000	5,500 1,000	3,700 500		16
18									18
20			15,000 1,000		8,000 1,000	5,000 500	3,000 500		20
25					7,000 1,000	4,000 500	3,000 500		25
30			10,000 1,000			3,500 500	2,500 250		30
35									35
40							2,000 250		40
45									45
50									50

PRODUCT CODE*

TTMWTXPAN40020ZC

PRODUCT DESCRIPTION*



M4 x 20 T-Drive Pan DIN 7500 FORM C Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM C DIN7985		T-Drive			Pan		A2 - Stainless Steel		
Dia. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D max
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
4									4
5			33,000 1,000						5
6			33,000 1,000		15,000 1,000	8,500 1,000			6
7									7
8			30,000 1,000		14,000 1,000	7,500 1,000	4,500 1,000		8
10			25,000 1,000		12,000 1,000	6,500 1,000	4,500 1,000		10
12			22,000 1,000		11,000 1,000	6,000 1,000	4,000 500		12
14									14
16			18,000 1,000		9,500 1,000	5,500 1,000	3,700 500		16
18									18
20			15,000 1,000		8,000 1,000	5,000 500	3,000 500		20
25			12,000 1,000		7,000 1,000	4,000 500	3,000 500		25
30						3,500 500	2,500 250		30
35							2,000 250		35
40							2,000 250		40
45									45
50									50

PRODUCT CODE*

PRODUCT DESCRIPTION*



SSTTMWTPAN50010A2 M5 x 10 T-Drive Pan DIN 7500 FORM C Tap-Fix® Screw A2-Stainless Steel

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM M DIN965

T-Drive

Countersunk

Zinc Plated (CR3) & Lubricated

Dia. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D max
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
4									4
5									5
6			65,000 1,000		30,000 1,000				6
7									7
8		75,000 1,000	44,000 1,000	35,000 1,000	26,000 1,000				8
10			38,000 1,000	30,000 1,000	20,000 1,000	12,000 1,000			10
12			30,000 1,000		20,000 1,000	10,500 1,000	8,000 1,000		12
14									14
16					15,000 1,000	9,000 1,000	6,000 1,000		16
18									18
20					12,000 1,000	7,500 1,000	5,000 500		20
25						6,000 1,000	4,000 500		25
30							3,000 250		30
35									35
40							2,500 250		40
45									45
50							1,500 250		50

PRODUCT CODE*

TTMWTXCSK60012ZC

PRODUCT DESCRIPTION*



M6 x 12 T-Drive Countersunk DIN 7500 FORM M Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM M DIN965			T-Drive		Countersunk		A2 - Stainless Steel		
Dia. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D max
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
4									4
5									5
6			65,000 1,000		30,000 1,000				6
7									7
8			44,000 1,000		26,000 1,000	15,000 1,000	12,000 1,000		8
10			30,000 1,000		20,000 1,000	12,000 1,000	10,000 1,000		10
12			30,000 1,000		20,000 1,000	10,500 1,000	6,000 1,000		12
14									14
16			25,000 1,000		15,000 1,000	9,000 1,000	6,000 1,000		16
18									18
20			18,000 1,000		12,000 1,000	7,500 1,000	5,000 500		20
25			13,000 1,000		9,000 1,000	6,000 1,000	4,000 500		25
30						4,000 500	3,000 250		30
35									35
40									40
45									45
50									50

PRODUCT CODE*

PRODUCT DESCRIPTION*

SSTTMWTXCSK30025A2


M3 x 25 T-Drive Countersunk DIN 7500 FORM M Tap-Fix® Screw A2-Stainless Steel

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM E SIMILAR			T-Drive		Socket Cap		Zinc Plated (CR3) & Lubricated		
Dia. D max	M4	M5	M6	M8	M10	-	-	-	Dia. D max
Dia. C max	4.08	5.09	6.10	8.13	10.15	-	-	-	Dia. C max
d1 - max	7.22	8.72	10.22	13.27	16.27	-	-	-	d1 - max
k - max	4.00	5.00	6.00	8.00	10.00	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T20	T25	T30	T40	T50	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
5									5
6									6
7									7
8									8
10	12,500 1,000	7,000 1,000							10
12	11,000 1,000	6,500 1,000	4,000 500						12
16	10,000 1,000	5,500 1,000	3,500 500						16
20	8,500 1,000	5,000 1,000	3,000 500						20
25	7,500 1,000	4,000 500	3,000 500						25
30			2,500 250						30
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-


PRODUCT CODE*	PRODUCT DESCRIPTION*
TTMWTXSCKCAP50020ZC	M5 x 20 T-Drive Socket Cap DIN 7500 FORM E Similar Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

DIN 7500

Thread Rolling Screws

FOR METAL



FORM E		Hexagon			Socket Cap		Zinc Plated (CR3) & Lubricated		
Dia. D max	M4	M5	M6	M8	M10	-	-	-	Dia. D max
Dia. C max	4.08	5.09	6.10	8.13	10.15	-	-	-	Dia. C max
d1 - max	7.22	8.72	10.22	13.27	16.27	-	-	-	d1 - max
k - max	4.00	5.00	6.00	8.00	10.00	-	-	-	k - max
s - A/F	3.00	4.00	5.00	6.00	8.00	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
5									5
6									6
7									7
8									8
10	12,500 1,000	7,000 1,000							10
12	11,000 1,000	6,500 1,000	4,500 500						12
16	10,000 1,000	5,500 1,000	3,500 500						16
20	8,500 1,000	5,000 1,000	3,500 500						20
25	7,000 1,000	4,000 500	3,000 500						25
30			2,500 250						30
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-


PRODUCT CODE*	PRODUCT DESCRIPTION*
TTMWHXSCKCAP40012ZC	M4 x 12 Hexagon Socket Cap DIN 7500 FORM E Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

DIN 7500 SIMILAR

Thread Rolling Screws

FOR METAL

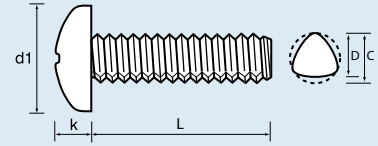

	Cross Recess (H)			Pan		Zinc Plated (CR3) & Lubricated			
Di. D max	M1.4	M1.7	M2.0	-	-	-	-	-	Di. D max
Di. C max	-	-	-	-	-	-	-	-	Di. C max
d1 - max	2.5	3.0	3.5	-	-	-	-	-	d1 - max
k - max	0.8	0.9	1.0	-	-	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	0	1	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
3	N/A 1,000	N/A 1,000							3
4	N/A 1,000	N/A 1,000	N/A 1,000						4
5	N/A 1,000	N/A 1,000	N/A 1,000						5
6	N/A 1,000	N/A 1,000	N/A 1,000						6
8			N/A 1,000						8
10			N/A 1,000						10
12									12
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-


PRODUCT CODE*	PRODUCT DESCRIPTION*
MI-TTMWHPAN14006ZC	M1.4 x 6 Cross Recess (H) Pan DIN 7500 Similar Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

DIN 7500 SIMILAR

Thread Rolling Screws

FOR METAL

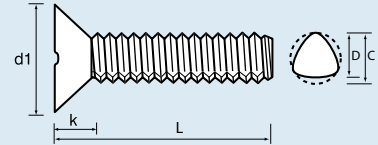

		Cross Recess (H)			Countersunk		Zinc Plated (CR3) & Lubricated		
Di. D max	M1.4	M1.7	M2.0	-	-	-	-	-	Di. D max
Di. C max	-	-	-	-	-	-	-	-	Di. C max
d1 - max	2.5	3.0	3.5	-	-	-	-	-	d1 - max
k - ref	0.7	0.8	0.9	-	-	-	-	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	0	1	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity								L- Length mm
3									3
4	N/A 1,000	N/A 1,000	N/A 1,000						4
5	N/A 1,000	N/A 1,000	N/A 1,000						5
6	N/A 1,000	N/A 1,000	N/A 1,000						6
8			N/A 1,000						8
10			N/A 1,000						10
12									12
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-


PRODUCT CODE*	PRODUCT DESCRIPTION*
MI-TTMWHCSK17006ZC	M1.7 x 6 Cross Recess (H) Countersunk DIN 7500 Similar Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

UNIFIED

Thread Rolling Screws

FOR METAL



	Pozidriv®		Pan		Zinc Plated (CR3) & Lubricated				
Dia.	2.56 UNC	4.40 UNC	6.32 UNC	8.32 UNC	10.24 UNC	10.32 UNF	¼" - 20 UNC	-	Dia.
Dia. D max	0.084	0.109	0.135	0.161	0.185	0.187	0.246	-	Dia. D max
Dia. C max	0.0875	0.1145	0.141	0.167	0.194	0.193	0.255	-	Dia. C max
d1 - max	0.167	0.219	0.270	0.322	0.373	0.373	0.492	-	d1 - max
k - max	0.062	0.080	0.097	0.115	0.133	0.175	0.218	-	k - max
Recess	1	1	2	2	2	2	3	-	Recess
L- Length ins	Bulk Carton Quantity Small Box Quantity								L- Length ins
3/16	105,000 1,000	50,000 1,000	30,000 1,000						3/16
1/4	90,000 1,000	45,000 1,000	28,000 1,000	16,000 1,000	11,000 1,000				1/4
5/16		40,000 1,000	25,000 1,000		10,000 1,000	10,000 1,000			5/16
3/8	75,000 1,000	40,000 1,000	22,000 1,000	14,000 1,000	9,000 1,000	9,000 1,000	4,500 1,000		3/8
7/16		30,000 1,000	20,000 1,000						7/16
1/2		30,000 1,000	20,000 1,000	11,500 1,000	8,000 1,000	8,000 1,000	4,000 500		1/2
9/16									9/16
5/8		20,000 1,000	16,000 1,000	8,000 1,000	7,500 1,000	7,000 1,000	4,000 500		5/8
3/4		22,000 1,000	12,000 1,000		6,000 1,000		3,500 500		3/4
7/8				8,500 1,000					7/8
1		15,000 1,000		6,000 1,000	5,000 500	3,500 500	2,000 250		1
1 1/4					3,500 500				1 1/4
1 1/2							1,500 250		1 1/2
1 3/4									1 3/4
2									2
-									-
-									-


PRODUCT CODE*	PRODUCT DESCRIPTION*
TTUCWZPAN29110ZC	4.40 UNC x 7/16 Pozidriv® Pan Unified Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

UNIFIED

Thread Rolling Screws

FOR METAL

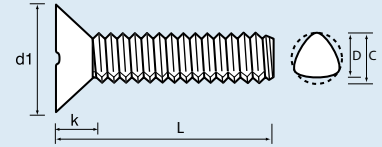

	Pozidriv® Countersunk Zinc Plated (CR3) & Lubricated								
Dia.	2.56 UNC	4.40 UNC	6.32 UNC	8.32 UNC	10.24 UNC	10.32 UNF	¼" - 20 UNC	-	Dia.
Dia. D max	0.084	0.109	0.135	0.161	0.185	0.187	0.246	-	Dia. D max
Dia. C max	0.0875	0.1145	0.141	0.167	0.194	0.193	0.255	-	Dia. C max
d1 - max	0.172	0.225	0.279	0.332	0.385	0.385	0.507	-	d1 - max
k - ref	0.051	0.067	0.083	0.100	0.116	0.116	0.153	-	k - ref
Recess	1	1	2	2	2	2	3	-	Recess
L- Length ins	Bulk Carton Quantity Small Box Quantity							L- Length ins	
3/16									3/16
1/4		62,000 1,000	38,000 1,000						1/4
5/16			35,000 1,000						5/16
3/8		50,000 1,000	29,000 1,000	21,000 1,000	12,000 1,000	12,000 1,000			3/8
7/16									7/16
1/2		40,000 1,000	25,000 1,000	15,000 1,000		11,000 1,000			1/2
9/16									9/16
5/8		33,000 1,000							5/8
3/4				11,000 1,000	7,000 1,000		4,000 500		3/4
7/8									7/8
1							3,500 500		1
1 1/4							3,000 250		1 1/4
1 1/2							2,500 250		1 1/2
1 3/4							2,000 250		1 3/4
2							2,000 250		2
2 1/4							1,500 200		2 1/4
2 1/2							1,400 200		2 1/2



PRODUCT CODE*	PRODUCT DESCRIPTION*
TTUCWZCSK42190ZC	8.32 UNC x 3/4 Pozidriv® Countersunk Unified Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).

UNIFIED

Thread Rolling Screws

FOR METAL



Washer Hexagon Zinc Plated (CR3) & Lubricated

Dia.	2.56 UNC	4.40 UNC	6.32 UNC	8.32 UNC	10.24 UNC	10.32 UNF	1/4" - 20 UNC	-	Dia.
Dia. D max	0.084	0.109	0.135	0.161	0.185	0.187	0.246	-	Dia. D max
Dia. C max	0.0875	0.1145	0.141	0.167	0.194	0.193	0.255	-	Dia. C max
d1 - max	0.166	0.243	0.328	0.348	0.414	0.414	0.520	-	d1 - max
k - max	0.66	0.99	0.135	0.146	0.151	0.151	0.240	-	k - max
s - A/F max	0.125	0.187	0.250	0.250	0.312	0.312	0.375	-	s - A/F max
L- Length ins	Bulk Carton Quantity Small Box Quantity								L- Length ins
3/16									3/16
1/4		35,000 1,000	20,000 1,000	15,000 1,000					1/4
5/16									5/16
3/8			18,000 1,000	11,000 1,000	10,000 1,000	14,000 1,000			3/8
7/16									7/16
1/2			16,000 1,000	11,000 1,000	8,000 1,000	8,000 1,000	3,500 500		1/2
9/16									9/16
5/8				10,000 1,000	7,500 1,000	7,500 1,000	3,000 500		5/8
3/4							3,000 500		3/4
7/8									7/8
1							2,000 250		1
1 1/4				6,000 500			2,000 250		1 1/4
1 1/2				4,000 500			1,500 250		1 1/2
1 3/4				4,000 500					1 3/4
2									2
2 1/4									2 1/4
2 1/2									2 1/2

PRODUCT CODE*	PRODUCT DESCRIPTION*
TTUCWWHX48160ZC	10.24 UNC x 5/8 Washer Hexagon Unified Tap-Fix® Screw Zinc Plated (CR3)

* Example product code and product description (see page vii for details).